

aleddra LED Lighting

Aleddra, Inc. • 2210 Lind Avenue SW • Suite 109 • Renton, WA 98057 • USA • t 425.430.4555 • f 425.968.9855 • www.aleddra.com


LED Flood Light 30W–600W



Description

Aleddra's LED Flood Light is designed with versatility in mind. It's compact and light weight, and with a wide range for wattage, from 30W to 600W, for all types of outdoor lighting applications. The higher wattage models can be used for sports field lighting. Its yoke mount bracket provides easy adjustment for different lighting direction. When mounting on the building, it can be used as a good wallpack fixture. It can also be used on the ground or as a wall wash light. The default beam angle is 60 degree. Aleddra offers many other beam angles on a made-to-order basis.

Dimensions:

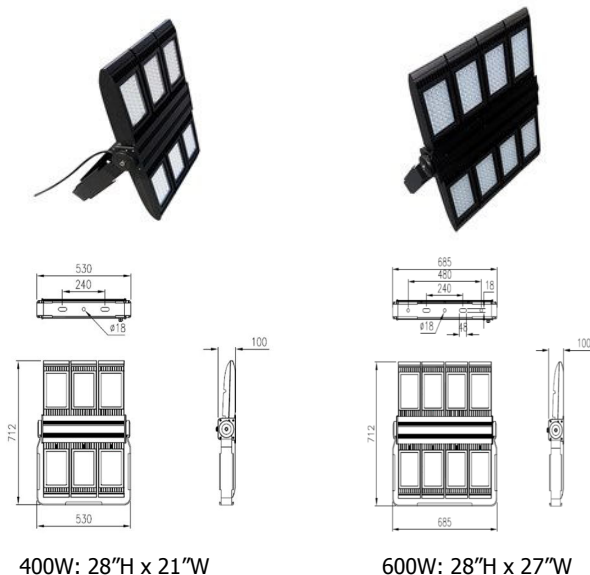

Key Features

- Light weight and compact exterior design
- Wide range of wattage: 30W to 600W
- Samsung LED diodes
- Meanwell driver
- Efficacy: 85-95 LM/W
- CCT: 3000K, 4000K, 5000K
- CRI > 70
- Power Factor >0.90
- Input voltage: 110V-277V, 50-60Hz
- Operating temperature: -40°F to 122°F
- Warranty: **5 years**
- Certification: **ETL, DLC**
- IP rating: IP65 wet location
- Yoke mount bracket with easy lighting direction adjustment

Ordering Information

Product Label	Wattage	Lumen	Weight (lbs)
AL-FL220-W030-60-30K	34W	2650	3.4
AL-FL220-W030-60-40K	34W	2900	3.4
AL-FL220-W030-60-50K	34W	3000	3.4
AL-FL280-W050-60-30K	50W	4300	7.0
AL-FL280-W050-60-40K	50W	4550	7.0
AL-FL280-W050-60-50K	50W	4700	7.0
AL-FL330-W100-60-30K	100W	8700	10.1
AL-FL330-W100-60-40K	100W	9500	10.1
AL-FL330-W100-60-50K	100W	10000	10.1
AL-FL390-W140-60-30K	140W	12800	18.0
AL-FL390-W140-60-40K	140W	13700	18.0
AL-FL390-W140-60-50K	140W	14000	18.0
AL-FL390-W210-60-30K	210W	18000	24.9
AL-FL390-W210-60-40K	210W	19400	24.9
AL-FL390-W210-60-50K	210W	20000	24.9
AL-FL675-W400-60-30K	420W	43200	48.0
AL-FL675-W400-60-40K	420W	45000	48.0
AL-FL675-W400-60-50K	420W	46000	48.0
AL-FL675-W600-60-30K	620W	57000	62.8
AL-FL675-W600-60-40K	620W	59600	62.8
AL-FL675-W600-60-50K	620W	61000	62.8

Remarks:

- Default beam angle: 60 degree. Other beam angles (10/30/85x135/60x135) made to order.
- 5000K in stock, other colors made to order