

# aleddra **LED Lighting**



**AWP-WL112-W80-50K**  
**AWP-WL112-W100-50K**  
**AWP-WL112-W120-50K**  
**AWP-WL112-W150-50K**



**AWP-WL090-W24-50K**  
**AWP-WL090-W48-50K**

Aleddra LED Lighting  
2210 Lind Ave. SW  
Suite 109  
Renton WA, 98057  
(425) 430-4555

## **WARNING:**

RISK OF Electric Shock - To avoid electric shock, serious injury or death, be certain that all electrical power is disconnected from the supply branch circuit conductors before installing or maintaining this fixture. This product must be installed and maintained in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.


## **Full Cut-off Wall Pack Installation Guide**

### **IMPORTANT INSTALLATION NOTES:**

1. All work should be done by a qualified electrician.
2. Fixture must be installed in accordance with the National Electric Code and all applicable local codes and ordinances.
3. To reduce the risk of electric shock, insure electricity has been turned off at the circuit breaker or fuse box before beginning.
4. This fixture is for outdoor use only and should not be used in areas with limited ventilation or high ambient temperatures.
5. Fixture should never be covered with anything to allow for heat dissipation.
6. Proper grounding is required to ensure safety.
7. All installation and safety instructions should be followed for full warranty coverage.


### **Instructions for installation**

1



1. Open fixture by loosening two (2) screws located on the side, to install the power supply box onto the mounting surface. (Note: Don't drop screw)


2



#### **WIRING:**

1. Check that voltage is compatible with fixture driver. Use code compliant connectors for all electrical connections.
2. Connect the black fixture lead to the black supply lead.
3. Connect the white fixture lead to the white supply lead.
4. Connect the green fixture lead to the green supply lead.


3

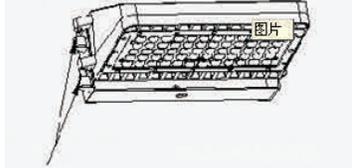

#### **MOUNTING:**

1. Push wire to the side of the driver and close the fixture.
2. Insert the side screws and tighten until secure.

4



**WARNING:** RISK OF FIRE - Keep combustible material an adequate distance from hot parts

**For additional instructions contact [aleddra.com](http://aleddra.com)**